

Elevator Measuring System for Shaft-copying

Encoder mounting fixture, guided-belt, LM3

max. height 53 m



System for shaft-copying, with complete mechanical kit in proven toothed belt technology.

A smooth-running toothed belt and a vibration-resistant encoder mounting fixture ensure quiet operation. The belt pulley can be mounted directly on the encoder shaft. With the guided-belt system, the encoder mounting fixture and the measuring wheels are located on the elevator car.

Ideal for use in passenger elevators, freight elevators, automatic storage systems.



Complete System

- Quick, easy mounting with accessories from a single source
- Reduced load on encoder bearings due to separate belt pulley-bearings
- Non-slip
- Tensioning rollers with belt guide

Minimal noise generation

- Smooth-running toothed-belt ensures extremely quiet operation
- Vibration-free operation

Order-No.

8.LM3.01

Encoder mounting fixture with measuring wheels for fixing on the elevator car

consists of:

- Encoder mounting fixture
- Measuring wheel
- Belt guide
- Belt fixing and tensioning set
- Screws and other small components

suitable encoders:

- Incremental encoder: 8.5000.83XX.XXXX

Calculation of pulse rate PPR =

$$\frac{300 \text{ mm}}{\text{Resolution, e.g. 0.5 mm}} = 600$$

- Absolute encoders:

SSI: 8.5863.12XX.XXXX

CANopen / CANLift: 8.5868.12XX.XXXX




Linear Measuring Technology

Elevator Measuring System for Shaft-copying Encoder mounting fixture, guided-belt, LM3 max. height 53 m

Accessories for encoder mounting fixture LM3

Fixing kit

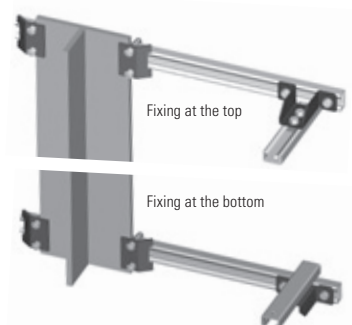


Complete kit consists of:

- C-rails, 700 mm
- Bracket
- Screws
- Other small components

8.BLM2.01

Toothed belt

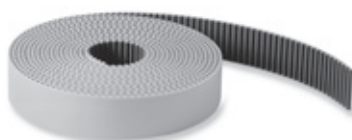

- Width 10 mm
- Polyurethane, with single parallel steel cords.
- Low belt-stretch
- High resistance to abrasive wear
- Resistant to the effects of UV radiation
- Maintenance-free
- Resistant to ageing
- Temperature range -10°C...+80°C

05.ZAR1.XXX

Calculation of the required length of toothed belt =
Elevator height + approx. 5 m
(depending on the distance between top and bottom
fixing)

XXX = Length in metres
Standard delivery lengths:
20 m, 25 m, 30 m, 35 m, 40 m,
45 m, 50 m, 55 m, 60 m, 70 m,
80 m, 90 m, 100 m, 120 m,
250 m, 300 m
Other lengths on request

General technical data

Resolution in the shaft	depends on the resolution of the encoder (e.g. incremental encoder with 3000 PPR = 0.1 mm; absolute encoder 12 x 12 bit < 0.1 mm)
Elevator car speed	max. 1.6 m/s
Max. height of elevator	53 m
Effective circumference of belt pulley	300 mm

Dimensions

