

Linear Measuring Technology

Length measuring kit

Displacement measuring device

with rack



Measuring system with mobile encoder holder, mounted on springs, (with rack and pinion) for an optimum contact pressure and protection of the encoder shaft.

Components suited optimally to each other. One rotation of the pinion corresponds to a movement of 50 mm.

The holding device for the encoder (8.0010.7000.0004) is a movable support for encoders, to the shaft of which, for instance, a measuring wheel or pinion can be attached. Due to the fact that it is movable, optimum contact pressure is ensured and overload on the bearings of the encoder prevented.

When used in conjunction with a pulse generating unit, the rack and pinion combination (8.0010.7000.0001 and ...0002) serves as a simple length and displacement measuring system. One rotation of the pinion on the rack corresponds to a displacement of 50 mm. Moreover the racks are designed in such a way that they can be butt-mounted without pitch error.

The absolute accuracy is 0.5 mm per meter. The resolution / repetition accuracy is 0.1 mm. Holding device, rack and pinion are available as a set for the purpose of displacement measurement (8.0010.7000.0005).


The installation aid (8.0010.7000.0003) is required to maintain exact pitch when butt-mounting racks.

Typical areas of application are:

- Wood working industry
- Textile industry
- Handling and automation technology
- Mechanical engineering / Special machines

Single components

Flexible holding device for encoders

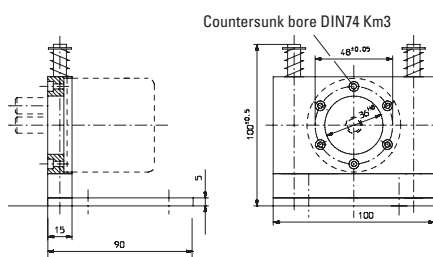


Guide rods Flange

stainless steel
Al

8.0010.7000.0004

Pinion for displacement measuring device




Material Surface Module pitch No of teeth

free-cutting steel
burnished
approx. 1
16

with bore diameter \varnothing 6 mm
with bore diameter \varnothing 10 mm

8.0010.7000.0002
8.0010.7000.0006

Rack




Material Surface Module pitch

S235JR
uncoated
approx. 1

8.0010.7000.0001

Installation aid



Material Surface Module pitch

S235JR
uncoated
approx. 1

8.0010.7000.0003

Encoder

type 5000, for rack and pinion, 0.1 mm resolution

8.5000.8354.0500

Standard cordset

with 2 m PVC cable, M12

05.WAKS8-2/P00

Preset counter

716 LED preset counter, 90 ... 260 V AC, 1 preset
923 LCD preset counter 90 ... 260 V AC, 1 preset

6.716.010.000
6.923.0100.000